




V-5100

Document Camera


KEY FEATURES:

- Extremely portable, it's a complete system in a fold-down, self contained package.
- Includes both a built-in base light and integrated, fold away top light arms.
- Efficient 12X power zoom and autofocus lens: focuses down to postage stamp size.
- Maintains focus through zoom range and adjusts to different height objects.
- 480,000 pixel very high resolution 1/3" CCD Camera is sensitive down to 5 Lux.
- Delivers 470 horizontal TV lines resolution at a signal-to-noise ratio of 50+ dB.

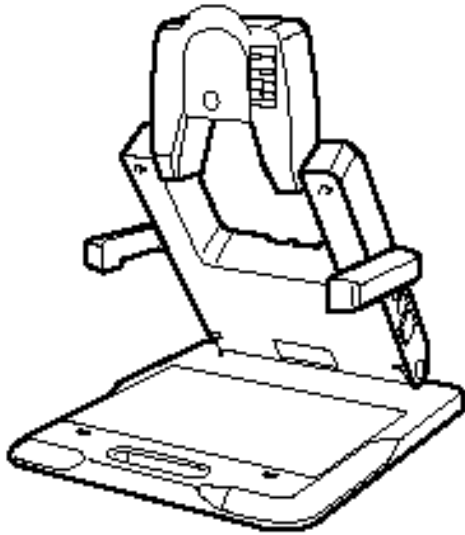

OTHER IMPORTANT FEATURES:

- Rotate head and remove lens adapter to use as a videoconference camera.
- Negative/Positive inversion permits corrected view of film negatives.
- Auto iris and white balance. 1/60th and 1/100th shutter speed.
- International Power: 100-120 / 200-240 VAC, 50/ 60 Hz.
- Included Accessories: Operators Manual. Power Cord. Audio/Video Cable. Dust Cover.
- Optional Accessories: Padded Carry Bag

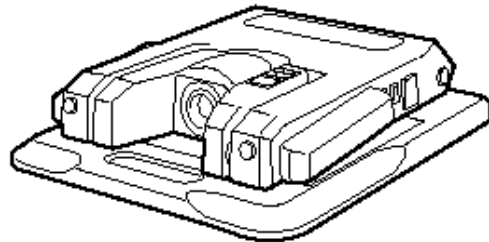

SPECIFICATIONS

Lensf1.8-2.7, FL: 5.4-64.8mm
 Image Area (Maximum, Wide)9.45" x 13" (240x330mm)
 Image Area (Minimum, Tele)91" x 1.18" (23x30mm)
 Zoom12X power zoom
 FocusAuto / Powered Manual
 IrisAuto
 Top LightingBuilt-in
 Base BacklightingBuilt-in
 TV SystemNTSC
 Camera1/3" CCDwith 480,000
 SynchronizationInternal
 Resolution470 TV (H) Lines
 Signal to Noise Ratiomore than 50dB
 White BalanceFull Automatic
 Shutter Speed Switchable: 1/60th or 1/100th sec.

Negative-Positive InversionSwitchable
 Microphone Input Jack1/4" phone jack (600ohm) x 1
 Composite Video OutputRCA x 1
 S-Video OutputMini DIN 4 pin x 1
 Audio OutputRCA x 1
 Power Requirements100-120 VAC, 50/60 Hz.
 Power Consumption13 Watts
 Dimensions - folded4.2 x 15.6 x 18.0 in (106 x 394 x 454 mm)
 Dimensions - set-up20.6 x 15.6 x 18.0 In (521 x 394 x 454 mm)
 Weight12.76 lbs. (5.8Kg)
 Warranty1 Year Parts and Labor

Specifications subject to change without notice.

©1998 EIKI International, Inc. Printed in the USA. 3/20/98